



Summary

[Request a quote](#)

[Catalog](#)

Coax	1
Socket / Receptacle	Socket / Receptacle - Elbow
Locking system	Push-pull
Size	0S
Series	S - Indoor Stepped Insert

Technical details

Electrical Configuration

Coax	1
Insert configuration value	0S.250 - 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated current	6 Amps
Test voltage (kV rms)	1.2
Contact Type	Coaxial 50 Ohm (PCB)
Cable type	Cable type: A RG 178 B/U, RG 196 A/U, RG 188 A/U, RG 316 B/U, RG 174 A/U, HF-2114, RG 122 /U S
Bucket Dia.	1 mm (0.04in)
Contact Dia.	0.9 mm (0.04in)

https://www.lemo.com/int_en/solutions/originals/s-indoor-stepped-insert/epl-0s-250-dtn.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Form & Material

Shell style / Model id	EPL - Elbow receptacle for printed circuit
Socket / Receptacle	Elbow
Housing material	Brass (gold plated [ISO 27874]) shell, collet nut, brass latch sleeve and mid pieces
Locking system	Push-pull
Keying	Circular, female
Weight	4.89 g

Environment

Technical domain	Audio Video, Energy and Industrial, Semiconductor, Test and Measurement
Environmental protection (IP rating)	IP50
Minimal temperature	-55°C / +250°C
Climatical Category	50/175/21
Humidity (max)	<=95% [at 60 deg C /140 F]
Shielding (min)	75 dB (10 MHz)
Shielding (min)	40 dB (1 GHz)
Shock Resistance	100 g [6 ms]
Vibration	15 g [10 Hz - 2000 Hz]

Drawings

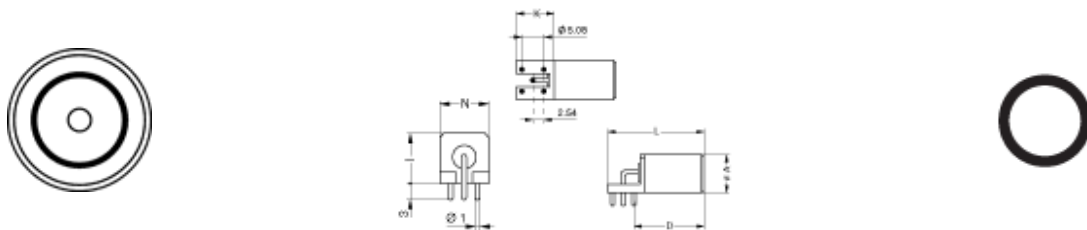

Dimensions

	A	D	H	I	K	L	N
mm.	8.8	16	12	9	7.7	22.7	9
in.	0.35	0.63	0.47	0.35	0.3	0.89	0.35

https://www.lemo.com/int_en/solutions/originals/s-indoor-stepped-insert/epl-0s-250-dtn.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.