



Image for illustrative purpose only

Summary

[Request a quote](#)

[Catalog](#)

Number of contacts Low Voltage	14
Socket / Receptacle	Socket / Receptacle - Fixed Panel Front Mounted
Locking system	Push-pull
Size	2C
Suggested matching part	FFA.2C.314.CLAC32

https://www.lemo.com/int_en/era-2c-314-cln.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Technical details

Electrical Configuration

Number of contacts Low Voltage	14
Contact Termination Low voltage	PCB - Straight
R (max)	6.1 mOhm
Insert configuration value	2C.314 - 14 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated current	5 A
Vtest	600 V (AC), 900 V (DC)
Max. Solid Conductor	0.25 mm ² (AWG 24)
Max. Stranded Conductor	0.14 mm ² (AWG 26)
Bucket Dia.	0.6 mm (0.02in)
Contact Dia.	0.7 mm (0.03in)

Form & Material

Shell style / Model id	ERA - Fixed receptacle, nut fixing
Socket / Receptacle	Fixed Panel Front Mounted
Housing material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Locking system	Push-pull
Keying	Hermaphroditic keying (half moon insert) with female pin 1
Weight	10.43 g


Environment

Environmental sealing (IP rating)	IP50
Endurance	500 mating cycles
Salt Spray Corrosion	>1000 hr

Drawings

https://www.lemo.com/int_en/era-2c-314-cln.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

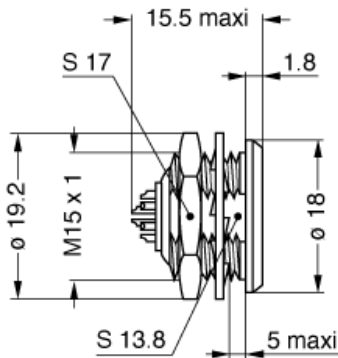

Dimensions

	A	L	e
mm.	18	15.6	M15x1.0
in.	0.71	0.61	

https://www.lemo.com/int_en/era-2c-314-cln.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.