



Summary

[Request a quote](#)

[Catalog](#)

| | |
|------------------------------------|-----------------------------------|
| Coax | 1 |
| Socket / Receptacle | Socket / Receptacle - Free |
| Locking system | Push-pull |
| Jacket cable outside diameter [mm] | 1.30 - 1.70 mm |
| Matching parts | FFA.00.250.CTAC17 |
| Series | 00 - NIM-CAMAC |

Technical details

https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/pca-00-250-ctlc17.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Electrical Configuration

| | |
|----------------------------|------------------------------|
| Coax | 1 |
| Contact Termination Coax | Solder |
| R (max) | 6.1 mOhm |
| Insert configuration value | 0.25 - 1 Coax (50 Ohm) |
| Insulator | T: PTFE |
| Rated current | 4 Amps |
| Impedance | 50 Ohm |
| VSWR | $1.09 + 0.11 * f/\text{GHz}$ |
| Vtest | 2100 V (AC), 3000 V (DC) |
| Contact Type | Coaxial 50 Ohm (Solder) |
| Test voltage | 2.1 kV (rms) |
| Bucket Dia. | 0.6 mm (0.024in) |
| Contact Dia. | 0.7 mm (0.028in) |

Form & Material

| | |
|------------------------|---|
| Shell style / Model id | PCA - Free receptacle with cable collet |
| Socket / Receptacle | Free |
| Housing material | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Locking system | Push-pull |
| Keying | Circular, female |
| Weight | 3.69 g |

Environment

| | |
|--------------------------------------|----------|
| Environmental protection (IP rating) | IP50 |
| F ret (min) | 100 N |
| Salt Spray Corrosion | >1000 hr |


Cable fixation

| | |
|------------------------------------|--|
| Cable termination protection | Standard back nut (no additional protection) |
| Fixation type | Cable collet |
| Jacket cable outside diameter [mm] | 1.30 - 1.70 mm |

https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/pca-00-250-ctlc17.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Drawings

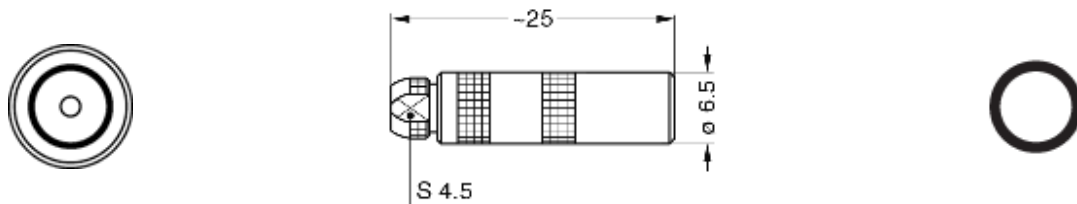

Dimensions

| | A | L | S2 |
|-----|----------|----------|-----------|
| mm. | 6.5 | 25 | 4.5 |
| in. | 0.26 | 0.98 | 0.18 |

https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/pca-00-250-ctlc17.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.