



HALO LED CONNECTORS DISPLAY CONNECTION STATUS



iacTM
by LEMO*

Halo LED connectors

The LEMO Halo LED connectors include a LED lighted flange to display connection status. This product is compatible with existing 1B, 1K and 2K series. The connectors are available with crimp or solder contacts.

Benefits:

- Displays connection status
- Push-Pull connector
- Innovative functionalities


Features:

- IP50 / IP68
- Available in various colours: red, blue, white, green, yellow
- Robust construction
- PEEK insulator with high insulating properties
- Operating temperature range: -40°C to +100°C

* LEMO launches its first IAC – intelligent active connector line - embedded with a special chip to help maintain secure connections in medical, aerospace/military and other critical applications. LEMO's new IAC connector uses Halo LED technology to indicate connection status.



Part number system

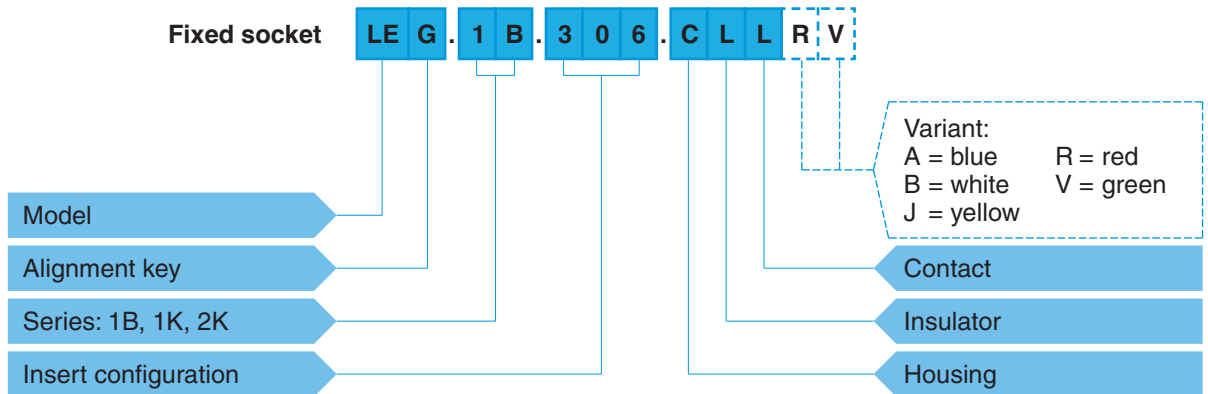



LEG.1B.306.CLLRV = fixed socket with LED flange, nut fixing, with key (G), 1B series, multipole type with 6 contacts, outer shell in chrome-plated brass, PEEK extended insulator, female solder contacts, with red and green halo LED.

LEG.1B.306.CLLR = fixed socket with LED flange, nut fixing, with key (G), 1B series, multipole type with 6 contacts, outer shell in chrome plated brass, PEEK extended insulator, female solder contacts, with red halo LED.


Models



LEG.1B Fixed socket, nut fixing, key (G) or keys (A...L)

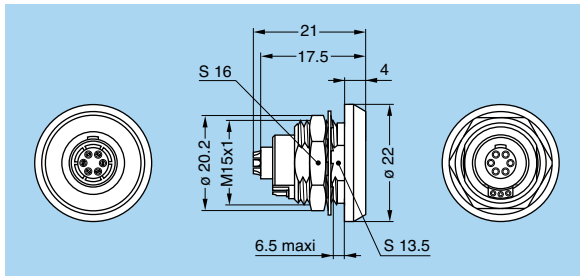

Panel cut-out

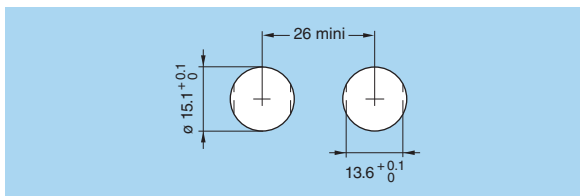

LEMO HEADQUARTERS

SWITZERLAND
 LEMO SA
 Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens
 Tel. (+41 21) 695 16 00 - Fax (+41 21) 695 16 02 - e-mail: info@lemo.com

www.lemo.com