

Summary

[Request a quote](#)

| | |
|----------------|---------------------|
| Gender | Standard |
| Locking system | Push-pull |
| Size | 2P |
| Series | REDEL P - Push-Pull |

https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-708-gllg.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Technical details

Electrical Configuration

| | |
|----------------------------|-----------------------------|
| Insert configuration value | 2P.708 - 1 High V. 8 Low V. |
| Rated current | 3 A |
| Gender | Standard |

Form & Material

| | |
|------------------|--|
| Housing material | PSU (Polysulfone), gray |
| Locking system | Push-pull |
| Keying | 3 keys (alpha=0, gamma=60, Plug: male contacts, Receptacle: female contacts) |
| Weight | 5.9 g |


Environment

| | |
|-----------------------------------|---|
| Technical domain | Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV |
| Environmental sealing (IP rating) | IP66 |

Cable fixation

| | |
|------------------------------|--|
| Cable termination protection | Standard back nut (no additional protection) |
|------------------------------|--|

Drawings

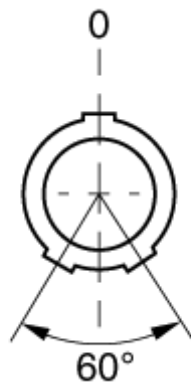

https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-708-gllg.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.