

Image for illustrative purpose only

Summary

[Request a quote](#)

[Catalog](#)

Gender	Standard
Locking system	Push-pull
Size	2P
Series	REDEL P - Push-Pull

Technical details

Electrical Configuration

Insert configuration value	2P.708 - 1 High V. 8 Low V.
Rated current	3 A
Gender	Standard

Form & Material

Housing material	PSU (Polysulfone), grey
Locking system	Push-pull
Keying	B: 3 keys (alpha=0, gamma=60, Plug: male contacts, Receptacle: female contacts)
Colour	Grey
Weight	5.9 g


Environment

Technical domain	Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP66

Cable fixation

Cable termination protection	Standard back nut (no additional protection)
------------------------------	--

Drawings

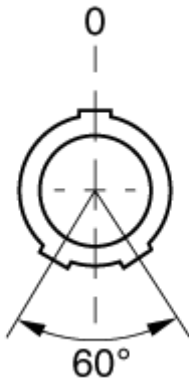

https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-708-gllg.html

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.