

*Image for illustrative purpose only*

## Summary

[Request a quote](#)

[Catalog](#)

Nb of contacts Triax	1
Plug	Plug - Bridge
Locking system	Snap-on
Size	0S
Series	S - Indoor Stepped Insert

[https://www.lemo.com/int\\_en/solutions/originals/s-indoor-stepped-insert/crf-0s-650-ptfj.html](https://www.lemo.com/int_en/solutions/originals/s-indoor-stepped-insert/crf-0s-650-ptfj.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Nb of contacts Triax	1
Insert configuration value	0S.650 - 1 Triax (50 Ohm)
Insulator	T: PTFE
Rated current	6 A
OHM	50
Cable type	RGT 178, RGT 174

## Form & Material

Shell style / Model id	CRF - Bridge plug with two non-latching plugs with monitoring output
Plug	Bridge
Housing material	PA.6 (Polyamide 6) shell without treatment, other pieces nickel plated [SAE AMS QQ N 290] brass
Locking system	Snap-on
Keying	3 keys (alpha=42, gamma=30, plug: male contacts, receptacle: female contacts)
Colour	Yellow
Variant	Yellow
Weight	16.09 g


## Environment

Technical domain	Audio Video, Energy and Industrial, Semiconductor, Test and Measurement
Environmental sealing (IP rating)	IP50
Endurance	1000 mating cycles
Temperature range	-50°C / +150°C
Climatical Category	50/175/21
Humidity (max)	<=95% [at 60 deg C /140 F]
Shielding (min)	75 dB (10 MHz)
Shielding (min)	40 dB (1 GHz)
Shock Resistance	100 g [ 6 ms]
Vibration	15 g [10 Hz - 2000 Hz]
Salt Spray Corrosion	>144 hr

[https://www.lemo.com/int\\_en/solutions/originals/s-indoor-stepped-insert/crf-0s-650-ptfj.html](https://www.lemo.com/int_en/solutions/originals/s-indoor-stepped-insert/crf-0s-650-ptfj.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Drawings

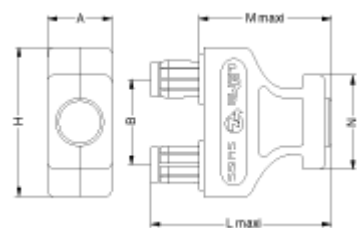

## Dimensions

	B	L	M	N	H	A
mm.	14	37.7	27.2	22.5	27.5	13.5
in.	0.55	1.48	1.07	0.89	1.08	0.53