



Image for illustrative purpose only

Summary

Request a quote

Catalog

See video assembly instructions

Number of contacts Low Voltage	55
Wire Size/AWG	24 - 20
Gender	Standard
Plug	Plug - Straight
Locking system	Ratchet
Jacket cable outside diameter [mm]	11.35 - 22.70 mm
Size	LM
Suggested matching part	PMW.LM.355.XLM
Series	M - Rugged Ratchet coupling

https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/fmw-lm-355-xlc.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Technical details

Electrical Configuration

Number of contracts I and Valtage				
Number of contacts Low Voltage	55			
Contact Termination Low voltage	Crimp			
R (max)	4.8 mOhm			
nsert configuration value	LM.355 - 55 (0.9 mm) Low Voltage			
nsulator	L: PEEK			
Rated current	3.5 A			
Test voltage (kV rms) Contact-contact	1.65			
Test voltage (kV rms) Contact-shell	1.95			
Contact retention	30 N			
Max. Conductor	0.5 mm^2 (AWG 20)			
Min. Conductor	0.25 mm^2 (AWG 24)			
Bucket Dia.	1.1 mm (0.043in)			
Contact Dia.	0.9 mm (0.035in)			
Wire Size/AWG	24 - 20			
Gender	Standard			
orm & Material				
Shell style / Model id	FM - Straight plug, key (N) or keys (P, R, S, T, U, V, W and X) with knurled grip			
Plug	Straight			
Housing material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass			
Locking system	Ratchet			
Keying	W: 5 keys (alpha=95, beta=115, gamma=35, delta=25, plug: male contacts, receptacle: female contacts)			
Colour	Grey			
Weight	31.72 g			


https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/fmw-lm-355-xlc.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Environment

Technical domain	Motorsport, Security and Defence, Transportation, Aerospace and UAV			
Environmental sealing (IP rating)	IP68			
Endurance	3000 mating cycles			
Temperature range	-55°C / +200°C (max. temperature valid for short periods of use.)			
EMI Shielding EIA 364-66A	>= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)			
Gunfire vibration	25 Hz - 2000 Hz, 3 axis (Apache helicopter)			
Humidity (max)	21 days at 95%			
Lighting strike EIA 364-76	10K amps - 6 times			
Shock Resistance	300 g [3 ms]			
Thermal shock	5 cycles: -65°C to +150°C			
Vibration-Random	37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]			
Vibration-Sine	30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]			
Salt Spray Corrosion	max. 48 hr			
Cable fixation				
Cable termination protection	Heatshrink			
Fixation type	Heatshrink			
Jacket cable outside diameter [mm]	11.35 - 22.70 mm			

Drawings

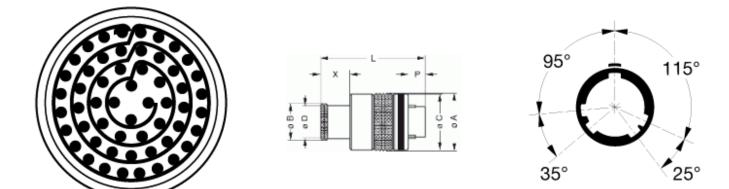

https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/fmw-lm-355-xlc.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Dimensions

	Α	В	С	D	Ls	Lr	Ρ	X
mm.	28.5	23.9	28	22.7	28.6	28.6	3.4	7.6
in.	1.12	0.94	1.1	0.89	1.13	1.13	0.13	0.3

Recommended By Lemo

Accessories

Replacement contact	FGN.0M.560.ZZC		
Compatible cap	BMF.LM.100.XAV		
Tools			
Positionner	DCE.91.090.5MVC		
Extraction tool	DCC.09.05B.LAG		
Crimp tool	DPC.91.701.V		

https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/fmw-lm-355-xlc.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.