



Image for illustrative purpose only

## Summary

[Request a quote](#)

[Catalog](#)

Number of contacts Low Voltage	12
Gender	Standard
Socket / Receptacle	Socket / Receptacle - Fixed Panel Rear Mounted
Locking system	Ratchet
Size	2M
Suggested matching part	<a href="#">FMN.2M.312.XLC</a>
Series	M - Rugged Ratchet coupling

[https://www.lemo.com/int\\_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html](https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Number of contacts Low Voltage	12
Contact Termination Low voltage	PCB - Straight
R (max)	6.1 mOhm
Insert configuration value	2M.312 - 12 Low Voltage
Insulator	L: PEEK
Rated current	7 A
Test voltage (kV rms) Contact-contact	1.65
Test voltage (kV rms) Contact-shell	1.15
Contact Dia.	0.7 mm (0.028in)
Gender	Standard

## Form & Material

Shell style / Model id	HE - Fixed receptacle, nut fixing for printed circuit, watertight
Socket / Receptacle	Fixed Panel Rear Mounted
Housing material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Locking system	Ratchet
Keying	N: 3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)
Colour	Grey
Variant	Watertight unmated (connector to device)
Weight	9.94 g



[https://www.lemo.com/int\\_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html](https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Environment

Technical domain	Motorsport, Security and Defence, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP68
Endurance	3000 mating cycles
Temperature range	-20°C / +80°C
EMI Shielding EIA 364-66A	>= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)
Gunfire vibration	25 Hz - 2000 Hz, 3 axis (Apache helicopter)
Humidity (max)	21 days at 95%
Lighting strike EIA 364-76	10K amps - 6 times
Shock Resistance	300 g [ 3 ms]
Vibration-Random	37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]
Vibration-Sine	30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]
Salt Spray Corrosion	max. 48 hr

## Drawings

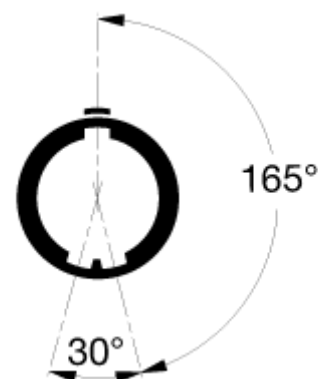

## Dimensions

	<b>A</b>	<b>C</b>	<b>e</b>	<b>E</b>	<b>H</b>	<b>Ls</b>	<b>Lr</b>	<b>N</b>	<b>P</b>	<b>R</b>	<b>S1</b>	<b>S2</b>
mm.	21	20.8	M17x1.00	5	8.89	20.8	21	16.8	5.3	13.8	15.5	18
in.	0.83	0.82		0.2	0.35	0.82	0.83	0.66	0.21	0.54	0.61	0.71

[https://www.lemo.com/int\\_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html](https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Recommended By Lemo

## Accessories

---

Compatible cap	<a href="#">BGK.2M.200.XAZ</a>
----------------	--------------------------------

## Tools

---

Spanner 2	<a href="#">DCM.65.180.AZ</a>
-----------	-------------------------------

Spanner wrench	<a href="#">DCM.65.180.AZ</a>
----------------	-------------------------------

[https://www.lemo.com/int\\_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html](https://www.lemo.com/int_en/solutions/optima/m-ratchet-coupling/hen-2m-312-xlnp.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.